



Model G Conveyor Spreading Table

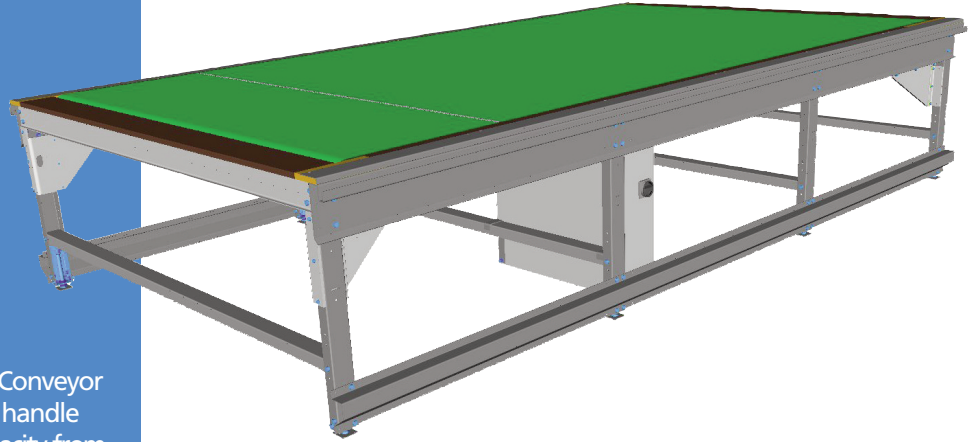

Gerber Technology's Model G Conveyor spreading table is designed to handle spreaders with a roll weight capacity from 50 kg (110 lbs) up to 250 kg (550 lbs)

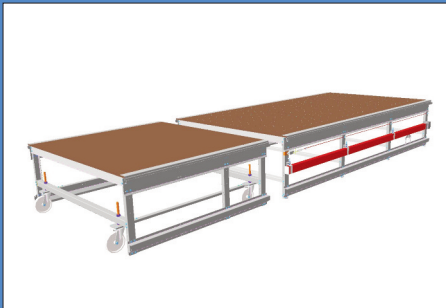

Model G Conveyor spreading table with manual transfer table



Guide rail and side frame combination

Tabletop for Model G Conveyor spreading table.

The Model G Conveyor spreading table is available with a full width conveyor belt and maximum table length of 15 meters (16.4 yards).

- Up to four tables may be installed in a single spreading line.
- The Model G Conveyor table is equipped with maintenance-free drum motors.

Other features.

- The Model G Conveyor table may be optionally equipped with a cutter interface that synchronizes the cutter conveyor with the spread table conveyor. Gerber recommends, as a minimum, to have the synchronization option on the table that feeds the cutter.
- Supports left or right hand operated spreading machine.
- Spreader rails and operator platform rails are integrated on both sides of the table.
- The Model G Conveyor table is available in widths that support the Gerber spreader product line as well as many other suppliers' spreaders.
- The table is designed and pre-drilled to mount power rails on either side of the table.

Frame for Model G Conveyor spreading table.


- Specially designed sturdy steel construction capable of supporting a fully loaded and equipped spreader of up to 850 kg (1900 lbs).
- The Model G Conveyor table supports up to 30 kg (66 lbs) material per meter².
- Sectioned in standard modules of 120 cm (47 in) length; 60 cm (24 in) sections available on request.
- Adjustable height to interface to the standard Gerber cutter heights from 75 cm (30 in) to 95 cm (38 in).
- Leveling of the table is done easily and quickly with integrated leveling screws in the table legs.

Model G Conveyor Spreading Table


Table widths:

Model G Conveyor table is available in the following widths:

Maximum width of material	Maximum width of table
160 cm / 64 in	180 cm / 72 in
180 cm / 72 in	200 cm / 80 in
200 cm / 80 in	220 cm / 88 in
220 cm / 88 in	240 cm / 96 in
240 cm / 96 in	260 cm / 104 in

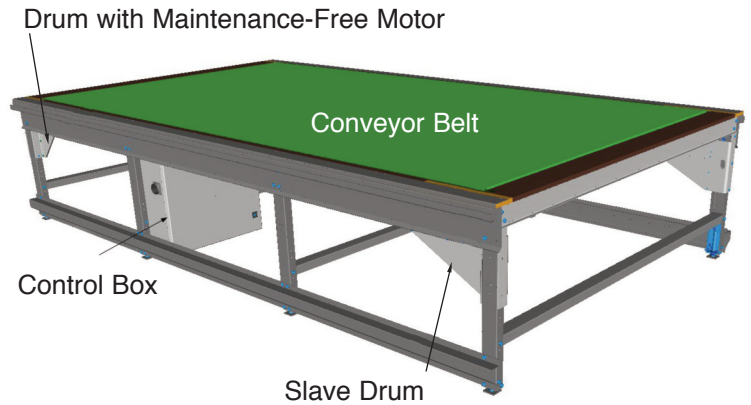

Maximum length per table: 15 meters (16.4 yards)
 Up to four 15-meter (16.4-yard) tables in one spreading line

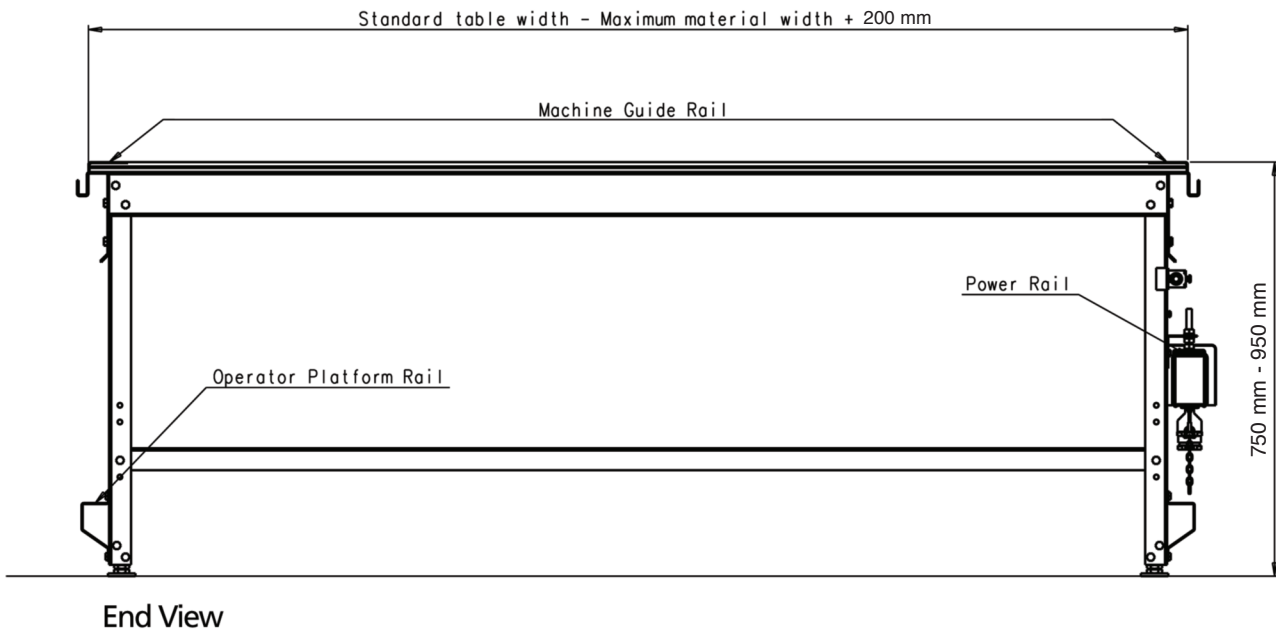

Power requirements for Model G Conveyor table

3 x 220-240 Volt + PE 50/60 Hz 10A

3 x 380-415 Volt + N + 50/60 Hz 10A

Power consumption (peak) 0.52 kW per conveyor table in one line